
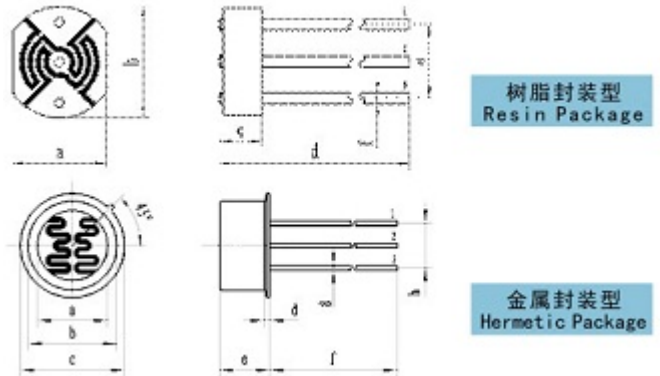


三引线复合型光敏电阻系列 Dual Elements Photocells Series

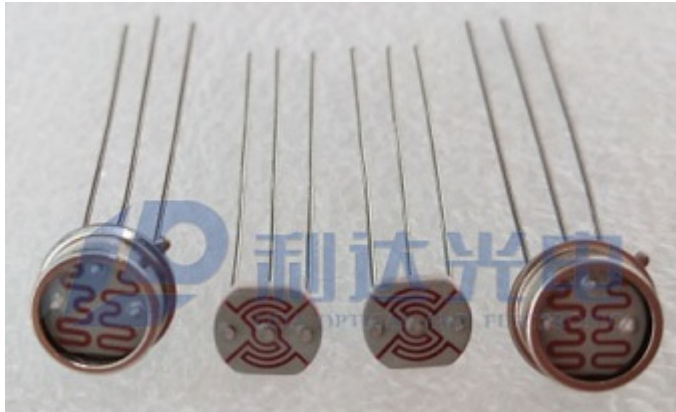

25°C电参数值 ELECTRO-OPTICAL CHARACTERISTICS @25°C

型号 Type	亮电阻 Light Resistance [10Lux] [KΩ]	暗电阻 Dark Resistance Min. [10s] [MΩ]	V_{10}^{100} typ.	使用温度 T_{OP} range [°C]	最大 电压 V_{max} [V]	最大 功耗 P_{max} [mW]	光谱 峰值 λ_{peak} [nm]	匹配性 Matching 10Lux R1-2/R2-3	外形尺寸 PACKAGE DIMENSIONS (mm)
GLF5528	8-20	1	0.65	-30~+70	150	100	560	0.7-1.3	a: $\Phi 5.1 \pm 0.2$ b: 4.3 ± 0.2 c: 2.4MAX d: 36 ± 2 e: 3.4 f: $\Phi 0.5$
GLF5537	18-50	2	0.7	-30~+70	150	150	560	0.7-1.3	
GLF5549	45-140	5	0.8	-30~+70	150	100	560	0.7-1.3	
GLF7528	8-20	0.5	0.65	-30~+70	150	100	560	0.7-1.3	a: $\Phi 7.0 \pm 0.2$ b: 5.9 ± 0.2 c: 2.6MAX d: 36 ± 2 e: 5.0 f: $\Phi 0.5$
GLF7537	18-50	2	0.7	-30~+70	150	150	560	0.7-1.3	
GLF7549	45-140	5	0.8	-30~+70	150	150	560	0.7-1.3	
GJF7528	8-20	0.5	0.65	-30~+70	150	100	560	0.7-1.3	a: $\Phi 6.7 \pm 0.2$ b: $\Phi 8.2 \pm 0.2$ c: $\Phi 9.2 \pm 0.2$ d: 0.8 ± 0.2 e: 5.0 ± 0.2 f: 30 ± 2 g: $\Phi 0.45$ h: 5.0
GJF7537	18-50	2	0.7	-30~+70	150	150	560	0.7-1.3	
GJF7549	45-140	5	0.8	-30~+70	150	150	560	0.7-1.3	