


# 环保型光敏电阻系列RoHS Compliance Photocells Series

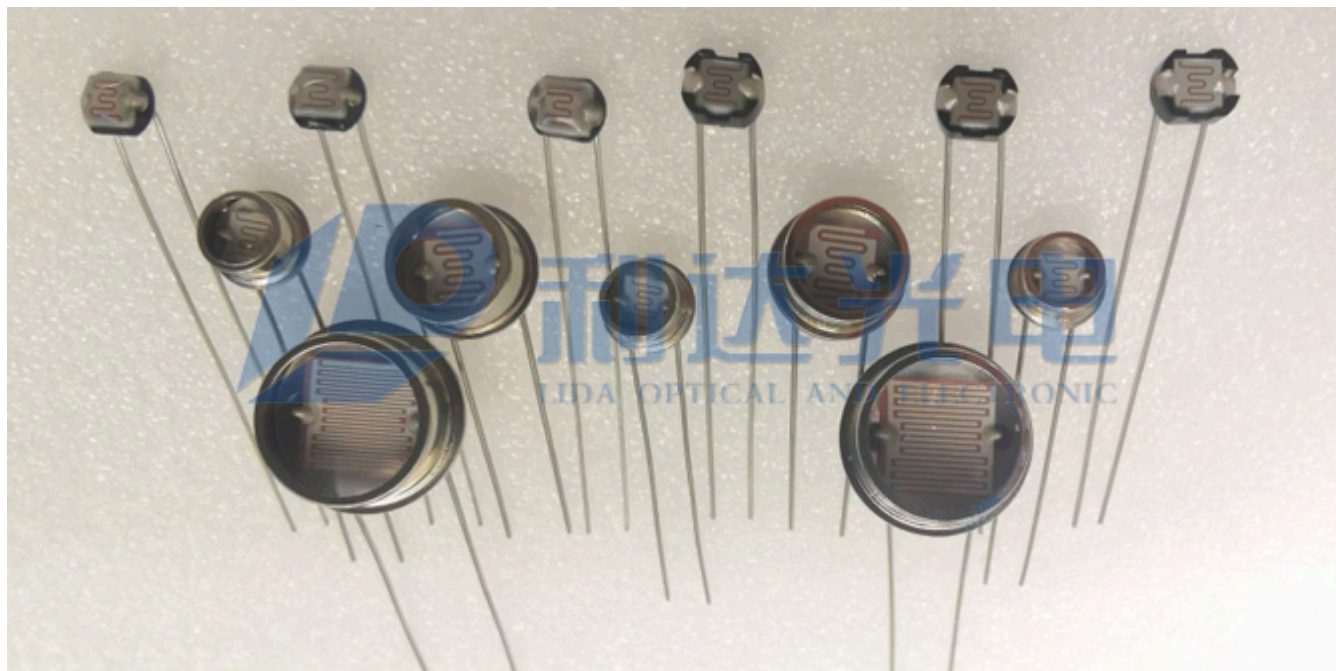

## 25°C参数值 ELECTRO-OPTICAL CHARACTERISTICS @ 25°C

型号 Type		亮电阻 Light Resistance [10Lux] [KΩ]	暗电阻 Dark Resistance Min .[10s] [MΩ]	$\gamma_{10}^{100}$ typ.	使用温度 $T_{op}$ range [°C]	最大 电压 $V_{max}$ [V]	最大 功耗 $P_{max}$ [mW]	光谱 峰值 $\lambda_{peak}$ [nm]	外形尺寸 PACKAGE DIMENSIONS (mm)
GH90	GH9011	8-20	1	0.65	-30~+70	60	100	560	与 A90 相同 As same as A90
	GH9012	18-50	2	0.75	-30~+70	100	100	560	
	GH9013	45-150	5	0.8	-30~+70	100	100	560	
GH99	GH9911	8-20	1	0.65	-30~+70	60	100	560	与 A99 相同 As same as A99
	GH9912	18-50	2	0.75	-30~+70	100	100	560	
	GH9913	45-150	5	0.8	-30~+70	100	100	560	
GHJA10	GHJA1011	8-20	1	0.65	-30~+70	60	100	560	与 GJ4.8相同 As same as GJ4.8
	GHJA1012	18-50	2	0.75	-30~+70	100	100	560	
	GHJA1013	45-150	5	0.8	-30~+70	100	100	560	
GHJB10	GHJB1011	8-20	1	0.65	-30~+70	60	100	560	与 GJ11相同 As same as GJ11
	GHJB1012	18-50	2	0.75	-30~+70	100	100	560	
	GHJB1013	45-150	5	0.8	-30~+70	100	100	560	
GHJC10	GHJC1011	8-20	1	0.65	-30~+70	60	100	560	与 GJ7相同 As same as GJ7
	GHJC1012	18-50	2	0.75	-30~+70	100	100	560	
	GHJC1013	45-150	5	0.8	-30~+70	100	100	560	